

## Stress plate HTK-2G-M/TKR (collated)



### Cross references

DABO® TKR-4.8  
 DABO® TKE-4.8  
 DABO® TKR-4-4.8  
 DABO® VHT-R-4.8  
 DABO® VHT-E-4.8  
 Stress plate HTK-2G 50



EJOT® installation tool ECOSET available as rental equipment. Article number G000000072

### Application range

- > To fix roofing membranes and insulating material to substructures made of sheet steel  $\geq 0.70 \text{ mm} \leq 1.5 \text{ mm}$ , timber or wood-based material
- > For new buildings
- > For the upright installation with ECOSET HTK installation tool
- > For special requirements of resistance to imposed loads
- > To reduce thermal bridges

### Properties

- > Stress plate: high-grade plastic material
- > DABO® screw TKR = case-hardened steel, Climadur®-coated
- > Collated (25 pcs. per cartridge)
- > Telescope design for resistance to imposed loads
- > Combinations for total panel thicknesses up to 605 mm possible


### Note

For combination with EJOT DABO® screws.  
 Drilling capacity = 4 mm on request!


### \*Climadur

High-grade coating to improve the corrosion protection (15 Kesternich cycles, DIN 50018, 1997)


### HTK-2G-M/TKR-60-35/50

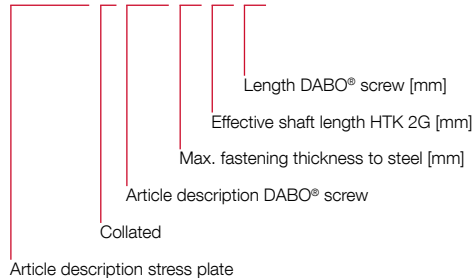

### Applications



### Technical specifications



### Certifications



### Product online



Order description	Total panel thickness [mm]	Effective Shaft length L [mm]	Screw length [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
HTK-2G-M/TKR-60-35/50	60	35	50	1000		3703505021	4061245012223
HTK-2G-M/TKR-80-55/50	80	55	50	1000		3705505021	4061245012209
HTK-2G-M/TKR-100-55/70	100	55	70	1000		3705507021	4061245012186
HTK-2G-M/TKR-120-95/50	120	95	50	1000		3709505021	4061245012162
HTK-2G-M/TKR-140-95/70	140	95	70	1000		3709507021	4061245012148
HTK-2G-M/TKR-160-115/70	160	115	70	700		3711507021	4061245012124
HTK-2G-M/TKR-180-145/60	180	145	60	700		3714506021	4061245012100
HTK-2G-M/TKR-200-145/80	200	145	80	700		3714508021	4061245012087
HTK-2G-M/TKR-220-145/100	220	145	100	700		3714510021	4061245012063
HTK-2G-M/TKR-240-145/120	240	145	120	700		3714512021	4061245012049
HTK-2G-M/TKR-260-145/140	260	145	140	700		3714514021	4061245012025
HTK 2G-M/TKR-280-145/160	280	145	160	700		3714516021	4061245012001

Order information: For timber substructures, screws need to be chosen 10 mm longer.